
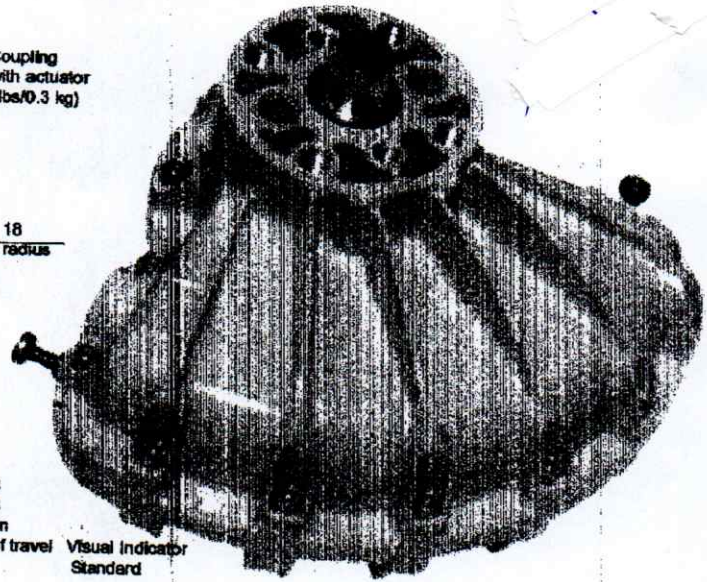


Εξομοιωτικός
Βάρος


Επίβαση

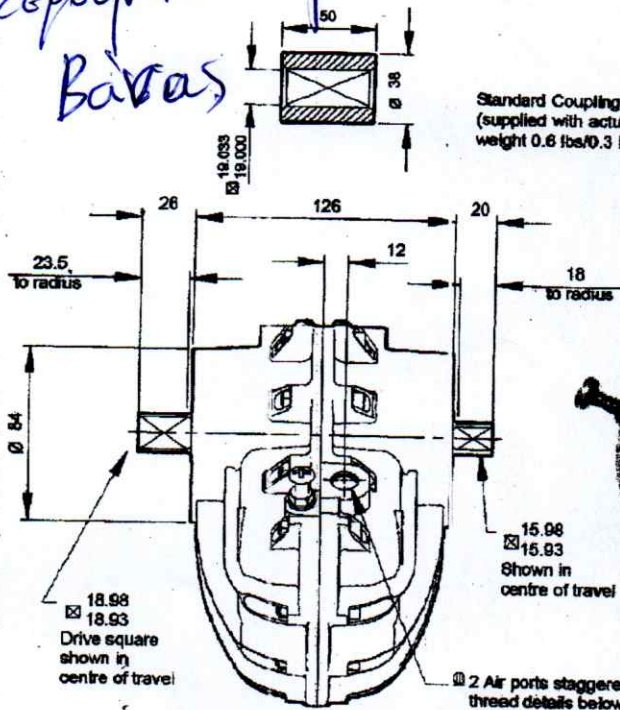

Model 09

○ Air Port/Mount Hole Details

Model	Air Ports	Mount Holes & Accessory Mount Holes
094-100	G ¹ / ₄	4 x M10 x 20 deep on 65.0 PCD 2 x M8 x 16 deep on 50.8 PCD
097-100	1/4 NPT	4 x 3/8 UNC x 0.75" deep on 2.58" PCD 2 x 5/16 UNC -18 x 0.63" deep on 2.00" PCD

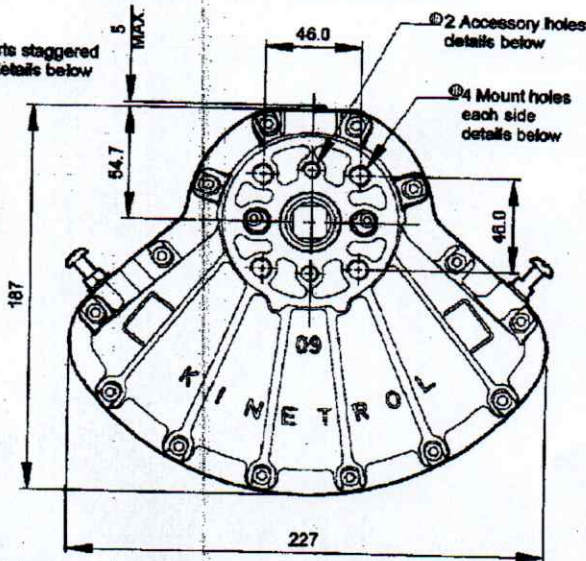

Specification

Output Torque

2280 lbf ins/261 Nm at 100 psi/7 bar

Angle of Travel (adjustable)

80° - 100° (restricted travel versions available)

Displaced Volume

39.3 in³/644 cm³

Finish

Epoxy stove enamel

Weight

8.52 lb/3.86 kg (excluding coupling)

For further information see General Specification on page 47.

Options

- Fail safe spring return units - clockwise or counter clockwise see pages 3-5
- Limit switch boxes for open/close indication - various switches for hazardous areas see pages 7-10
- AP pneumatic positioner - full range of options see pages 15/16
- EL electropneumatic positioner - full range of options see pages 13/14
- Integral solenoid valve see page 18
- P3 on/off positioner full range of options including hazardous area see pages 19-21
- Clear Cone position monitor see page 18
- 180° model see pages 23/24
- Female drive and mounting details to DIN 3337 and ISO 5211 see page 48
- ISO adaptor see page 6
- G³/₈ or 1/2 NPT air port option available - contact Kinetroil
- Spring to centre see page 22
- Geared manual override see page 44
- Code Identification see page 57
- Torque outputs see pages 55/56
- See pages 48-50 for English dimensions and dimensions of spring options
- High temperature / Low temperature options see page 47



KINETROL 34