


DF-G1-KS-Q5

Photoelectric Sensor – Photoelectric Sensor for Plastic Fibers

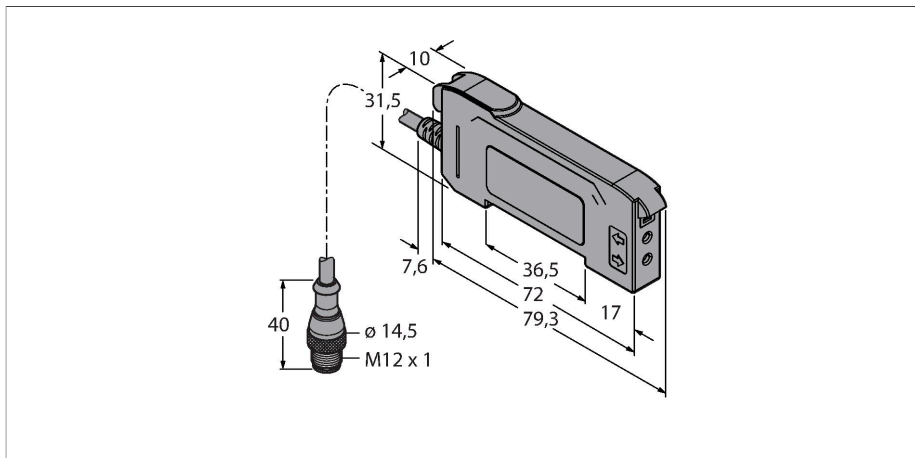


Technical data

Type	DF-G1-KS-Q5
ID	3019524
Optical data	
Function	Fiber optic sensor
Operating mode	Plastic fiber
Light type	Red
Wavelength	660 nm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 40 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Communication protocol	IO-Link
Output function	NO/NC, PNP
Switching frequency	5 kHz
Readiness delay	≤ 500 ms
Response time typical	< 0.2 ms
Setting option	Push Button
IO-Link	
IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Frame type	Type_2_2
Minimum cycle time	2 ms
Function Pin 4	IO-Link

Features

- Cable with male end M12x1
- Visible red light
- Programming via teach cable or multi-function button
- Operating voltage: 10...30 VDC
- IO-Link
- 2 × PNP output, changeover contact
- Light/dark operation

Wiring diagram




Functional principle

Glass or fiber optics are the optimum choice for high temperature or space restricted applications. Fiber optics transfer the light from the sensor to a remote object. Individual fiber optics are used for opposed mode sensing, whereas bifurcated fiber optics are suited for diffuse mode operation.

Technical data

Function Pin 2	DI
Maximum cable length	20 m
Profile support	Smart Sensor Profil
Included in the SIDI GSDML	Yes
Mechanical data	
Design	Rectangular, DF-G1
Dimensions	79.3 x 10 x 33 mm
Housing material	Plastic, Thermoplastic material, Black
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	4
Ambient temperature	-10...+55 °C
Relative humidity	0...90 %
Protection class	IP50
Special features	keep/defer
Switching state	LED, Yellow
Excess gain indication	Dual Digital Displays
Tests/approvals	
Approvals	CE, cULus listed

Excess Gain Curve

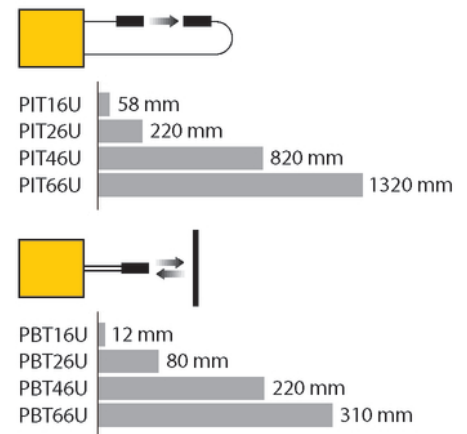





Accessories

DIN-35-70	3026604	DIN-35-105	3030470
	DIN rail, width 35 mm, length 70 mm		DIN rail, width 35 mm, length 105 mm
DIN-35-140	3026605		
	DIN rail, width 35 mm, length 140 mm		

Accessories

Dimension drawing	Type	ID	
<p>Technical drawing of the RKC4.4T-2/TEL cable connector. It shows a side view of the M12 connector with dimensions: 11.5 mm for the connector body, 42 mm for the cable length to the fork, and 50 mm for the fork length. The connector has a diameter of 15 mm and a thread of M12 x 1.</p>	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
<p>Technical drawing of the WKC4.4T-2/TEL cable connector. It shows a side view of the M12 connector with dimensions: 26.5 mm for the connector body, 32 mm for the cable length to the fork, and 50 mm for the fork length. The connector has a diameter of 15 mm and a thread of M12 x 1.</p>	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

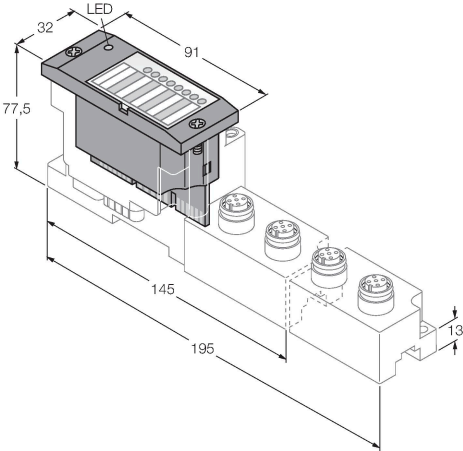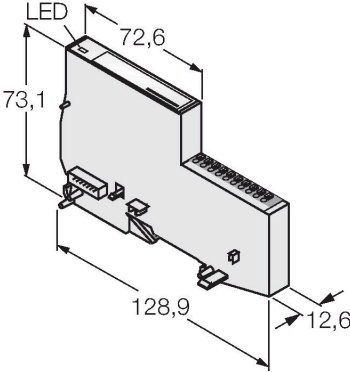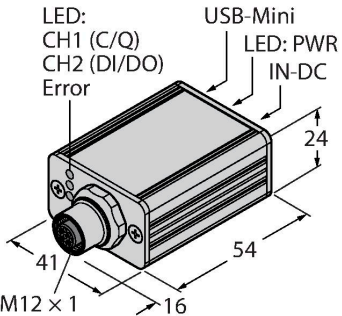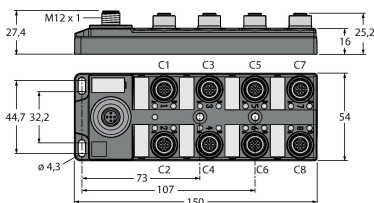Dimension drawing	Type	ID	
 <p>LED</p> <p>32</p> <p>91</p> <p>77,5</p> <p>145</p> <p>195</p> <p>13</p>	BL67-4IOL	6827386	4-channel IO-Link Master module for the modular BL67 I/O-system
 <p>LED</p> <p>72,6</p> <p>73,1</p> <p>128,9</p> <p>12,6</p>	BL20-E-4IOL	6827385	IO-Link master module for the modular BL20 I/O system, 4-channel
 <p>LED: CH1 (C/Q)</p> <p>LED: CH2 (DI/DO)</p> <p>Error</p> <p>USB-Mini</p> <p>LED: PWR</p> <p>IN-DC</p> <p>24</p> <p>54</p> <p>41</p> <p>M12 x 1</p> <p>16</p>	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port
 <p>M12 x 1</p> <p>27,4</p> <p>25,2</p> <p>16</p> <p>44,7</p> <p>32,2</p> <p>54</p> <p>ø 4,3</p> <p>73</p> <p>107</p> <p>150</p> <p>C1 C3 C5 C7</p> <p>C2 C4 C6 C8</p>	TBIL-M1-16DXP	6814102	16-channel I/O-hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

Dimension drawing



Type

ID

TBEN-S2-4IOL

6814024


Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A

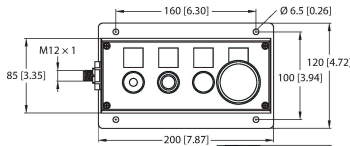

OPIL-E4-IO2-FE01(DE)

100029326



16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

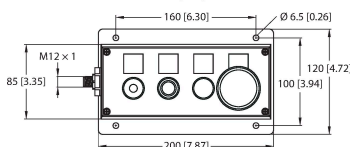

OPIL-E4-IO2-FE02

100029327



16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

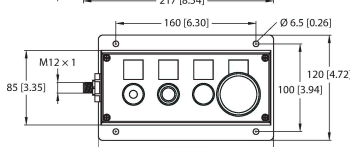

OPIL-E4-IO2-FE03

100029328



16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

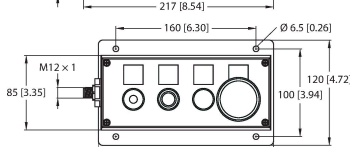

OPIL-E4-IO3-FE04

100036394



16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

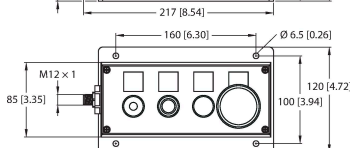

OPIL-E4-IO3-FE01

100036505


16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)

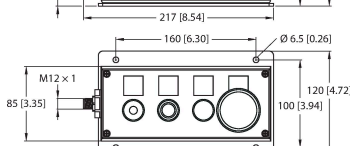

OPIL-E4-IO3-FE02

100036506

16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)



mm [inch]

mm [inch]


mm [inch]

mm [inch]

mm [inch]

mm [inch]

Dimension drawing

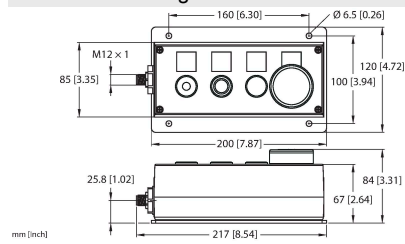


Type

OPIL-E4-IO3-FE03

ID

100036507

16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)



PBT16U


3042822

Plastic fiber-optic sensor, operating mode: Diffuse mode, threaded sleeve M3 x 0.75 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C

PBT26U

3026080


Plastic fiber, sensing mode: Diffuse mode, threaded bush M3 x 0.75 mm, preassembled wire without end tip, polyethylene jacket, ambient temperatures -30 °C...+70 °C

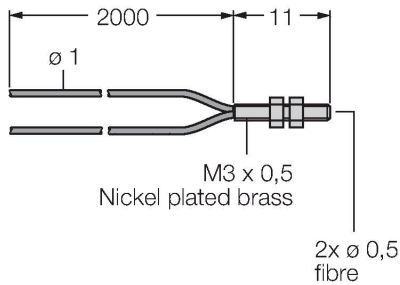



PBT46U

3025967

Plastic fiber-optic sensor, operating mode: Diffuse mode, threaded sleeve M3 x 0.75 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C

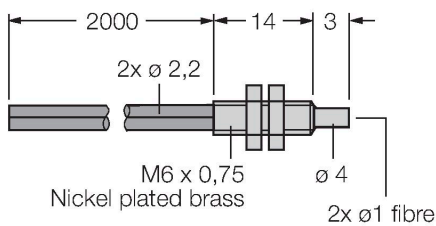


Dimension drawing	Type	ID	
	PBT66U	3039982	Plastic fiber-optic sensor, operating mode: Diffuse mode, threaded sleeve M6 x 0.75 mm, pre-assembled wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C

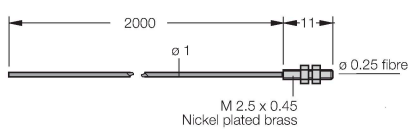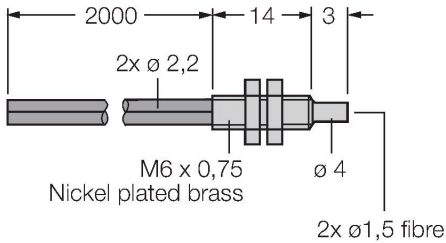


PIT16U	3039983	Plastic fiber-optic sensor, operating mode: Opposed mode, threaded sleeve M3 x 0.5 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C
--------	---------	---

PIT26U	3026079	Plastic fiber, sensing mode: Opposed mode, threaded bush M3 x 0.5 mm, preassembled wire without end tip, polyethylene jacket, ambient temperatures -30 °C...+70 °C
--------	---------	--

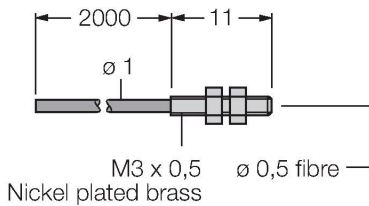

PIT46U	3026034	Plastic fiber-optic sensor, operating mode: Opposed mode, threaded sleeve M3 x 0.5 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C
--------	---------	---

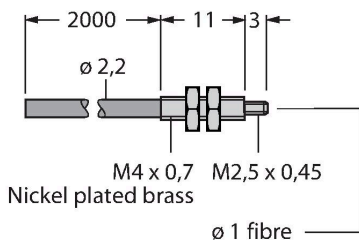

Dimension drawing	Type	ID	
	PIT66U	3039899	Plastic fiber-optic sensor, operating mode: Opposed mode, threaded sleeve M3 x 0.5 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C

